



GENERAL NOTES:

- A. PARTITION DIMENSIONS ARE GIVEN TO THE FACE OF STUD UNLESS OTHERWISE NOTED.
- B. DOOR AND WINDOW OPENING LOCATIONS ARE DIMENSIONED TO ROUGH OPENING OR CENTERLINE OF OPENING. COORDINATE WITH DOOR SCHEDULE AND WINDOW TYPES, SHEET A6.2.
- C. IF A WALL TYPE IS NOT INDICATED ON A WALL, USE THE TYPICAL WALL TYPE AS NOTED.
- D. PROVIDE SOLID WOOD BLOCKING IN WALLS FOR ALL CABINETRY, FIXTURES, DOOR STOPS, AND EQUIPMENT PRIOR TO INSTALLING GYPSUM WALL BOARD.
- E. ALL GYPSUM WALL BOARD TO BE TYPE 'X'. PROVIDE MOISTURE RESISTANT GYPSUM BOARD ON WALL WALLS WITHIN TOILET ROOMS AND JANITOR CLOSETS, BEHIND CERAMIC WALL TILE, AND BEHIND OTHER FINISHES THAT GENERATE WATER, U.O.N.
- F. GYPSUM WALL BOARD SHALL EXTEND FULL HEIGHT OF WALL TO UNDERSIDE OF STRUCTURE ABOVE UNLESS OTHERWISE NOTED. SEE WALL TYPES.
- G. RE: A6.2 FOR DOOR, WINDOW AND FRAME SCHEDULES.
- H. RE: A6.1 FOR FINISH SCHEDULE.
- J. RE: A7.1, A7.2, A7.3, A7.4 AND A7.5 FOR EXTERIOR AND INTERIOR DETAILS.
- K. RE: A8.1 FOR ACCESSORY / EQUIPMENT TYPES INDICATED.
- L. RE: A9.1 AND 9.2 FOR CEILING INFORMATION.
- M. RE: A10.1 AND A10.2 FOR FURNITURE AND EQUIPMENT PLANS.
- N. PROVIDE APPROPRIATE FLOOR TRANSITIONS BETWEEN DISSIMILAR FLOOR MATERIALS AS REQUIRED.
- P. EXTERIOR FINISH INFORMATION IS NOT INDICATED NOR DIMENSIONED ON FLOOR PLAN. REFER TO EXTERIOR ELEVATIONS, RESTORATION DRAWINGS, AND DETAILS FOR ADDITIONAL INFORMATION.
- Q. THE HINGE SIDE OF ALL DOOR FRAMES SHALL BE MOUNTED 4" (0.102m) FROM ADJACENT PERPENDICULAR WALL U.O.N. EXISTING OPENING THAT ARE TO BE REVISED SHALL REMAIN WHERE LOCATED.
- R. THE DRAWINGS INDICATE LOCATION, DIMENSIONS, REFERENCE, AND TYPICAL DETAILS OF CONSTRUCTION. THE DRAWINGS DO NOT INDICATE EVERY CONDITION - WORK NOT PARTICULARLY DETAILED SHALL BE OF CONSTRUCTION TO PARTS THAT ARE DETAILED. THESE DRAWINGS HAVE BEEN DEVELOPED FROM RECORDS FURNISHED BY THE OWNER AND FIELD SURVEYS. PATTERNS, AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
- S. PROTECT ALL EXISTING WORK TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, COMPONENTS, FINISHES, AND THE LIKE, DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE.
- T. REHABILITATE ALL EXTERIOR WOOD WINDOW FRAMES.
- U. PATCH ANY DAMAGED GYPSUM BOARD INDICATED TO REMAIN.
- V. NOTCH GYPSUM BOARD AROUND ANY NEW OR EXISTING ELEMENTS WHERE METAL STUD WALLS ARE TO BE CONSTRUCTED.
- W. PROVIDE FRAMING TO SQUARE OFF CORNERS AS REQUIRED WHERE CURVED PLASTER WAS REMOVED.
- X. NOTE THAT PLASTER AND LATH THAT WAS REMOVED FROM THE HISTORIC WALLS AND CEILINGS ON THE ENTIRE THIRD FLOOR WILL BE REPLACED WITH GYPSUM BOARD. THE ROUNDED CORNERS (BOTH VERTICAL AND HORIZONTAL) WILL BE REPLACED WITH SQUARE OR ANGLED CORNERS. REVISE EXISTING FRAMING AND SUSPENSION SYSTEMS. PROVIDE ADDITIONAL SUPPORT AS REQUIRED.
- Y. VERIFY DIMENSIONS OF EXISTING OPENINGS PRIOR TO FABRICATING AND INSTALLING NEW FRAME AND DOOR. PROVIDE NEW BLOCKING AS REQUIRED.
- Z. PAINT THE HEATING WATER PIPING THAT IS EXPOSED TO VIEW BELOW THE UNIT. PAINT ALL WALL SURFACES THAT ARE VISIBLE BEHIND HEATING UNIT WHEN COVER IS IN PLACE.
- AA. THE CONTRACTOR SHALL FIELD VERIFY EXISTING PAINT MATERIALS AND FINISHES. APPLY THE APPROPRIATE SEPARATION COAT (PRIMER/BONDING COAT) BETWEEN ALL NON-COMPATIBLE COATINGS (I.E. WHERE NEW WATER-BORNE ACRYLIC IS TO BE INSTALLED OVER EXISTING OIL BASE PAINT).
- BB. ASSURE THAT ALL REQUIRED BACKING IS INSTALLED IN WALLS PRIOR TO INSTALLING DRYWALL. THIS INCLUDES BACKING FOR WALL-MOUNTED DOORSTOPS.
- CC. ALL EXPOSED INTERIOR SURFACES, WALLS, FRAMES, ETC., REQUIRED TO HAVE NEW FINISHES APPLIED, SHALL HAVE ALL EXISTING AND CONTRACTOR CAUSED HOLES, CRACKS, AND OTHER IMPERFECTIONS FILLED WITH APPROVED PATCHING MATERIAL. WALLS AND CEILINGS THAT WILL BE COVERED WITH GYPSUM BOARD OR FURRING DO NOT NEED TO BE PATCHED UNLESS THE OPENING IS TOO BIG TO ATTACH SUBSTRATE, IT IS PART OF A RATED ASSEMBLY, OR IT IS NOT STRUCTURALLY SOUND. PATCH TO BE FINISHED FLUSH WITH ADJACENT SURFACE, WITH TEXTURE TO MATCH TEXTURE OF ADJACENT SURFACE. SEE SPECIFICATIONS FOR PATCHING REQUIREMENTS.
- DD. ALL FILE DRAWERS MUST HAVE A MINIMUM CLEAR INSIDE HEIGHT OF 10-1/2" AND A MINIMUM CLEAR INSIDE WIDTH OF 13", U.O.N.

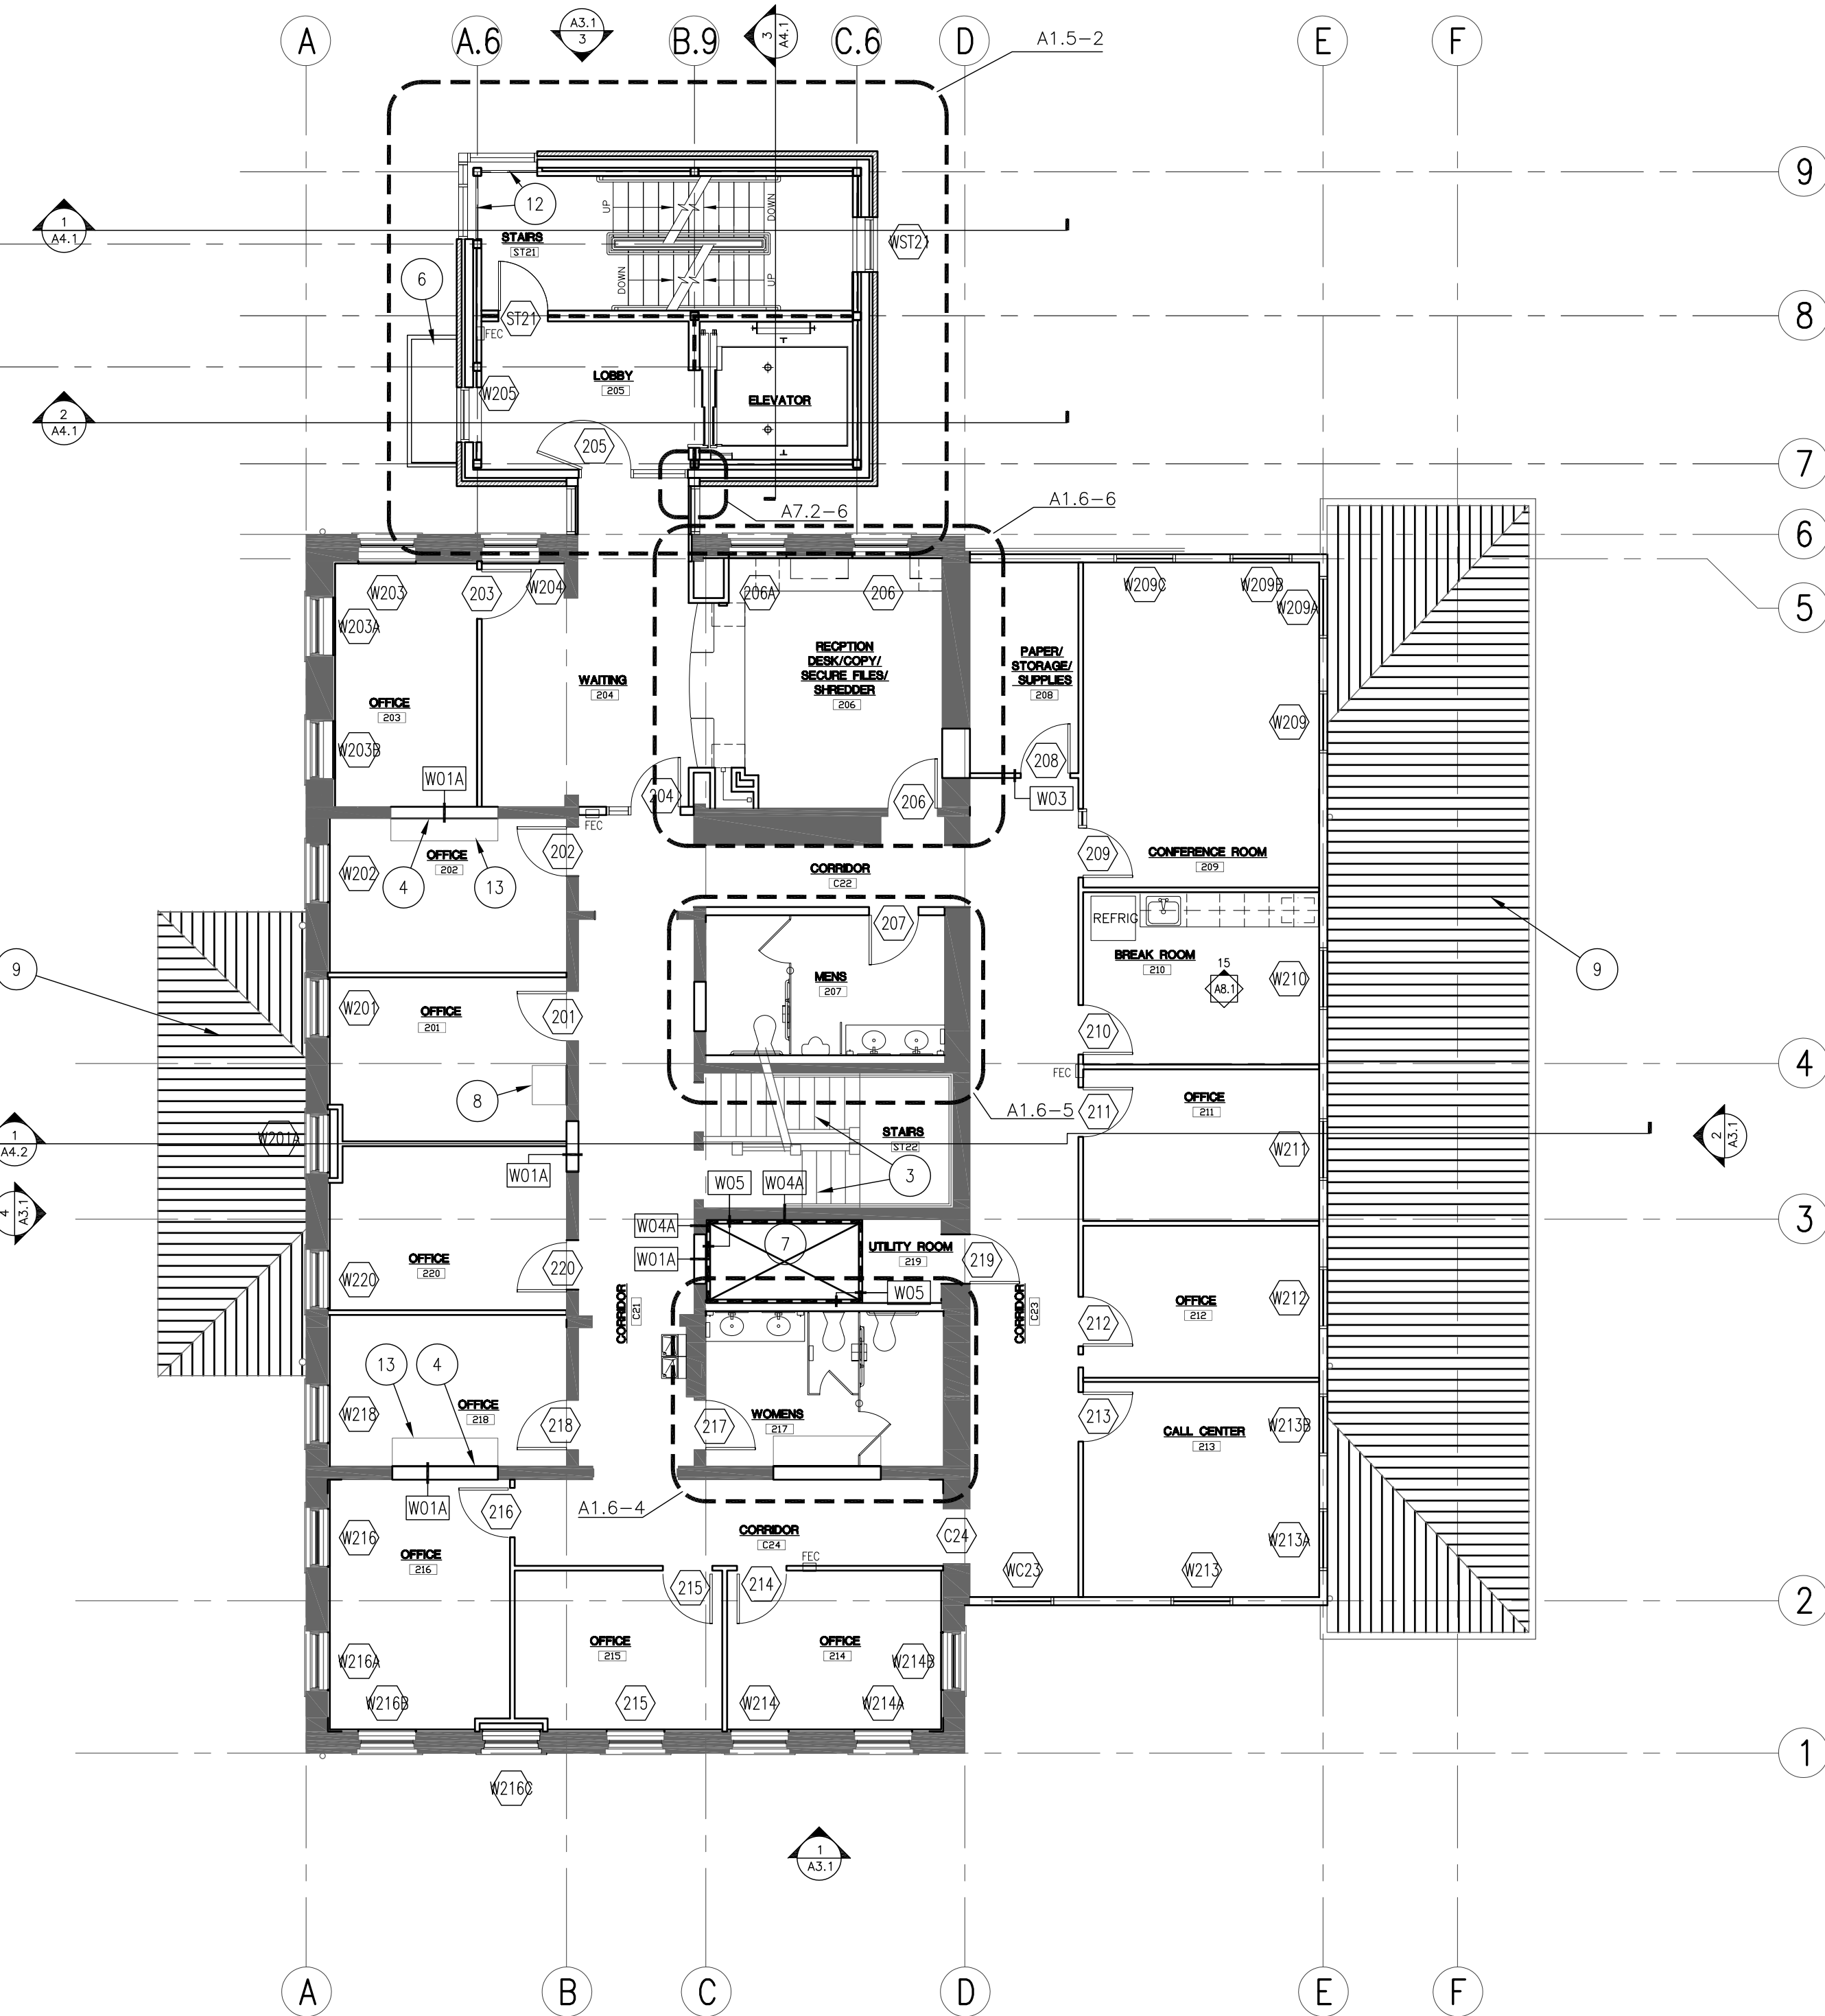

1 SECOND FLOOR PLAN BLDG. 33

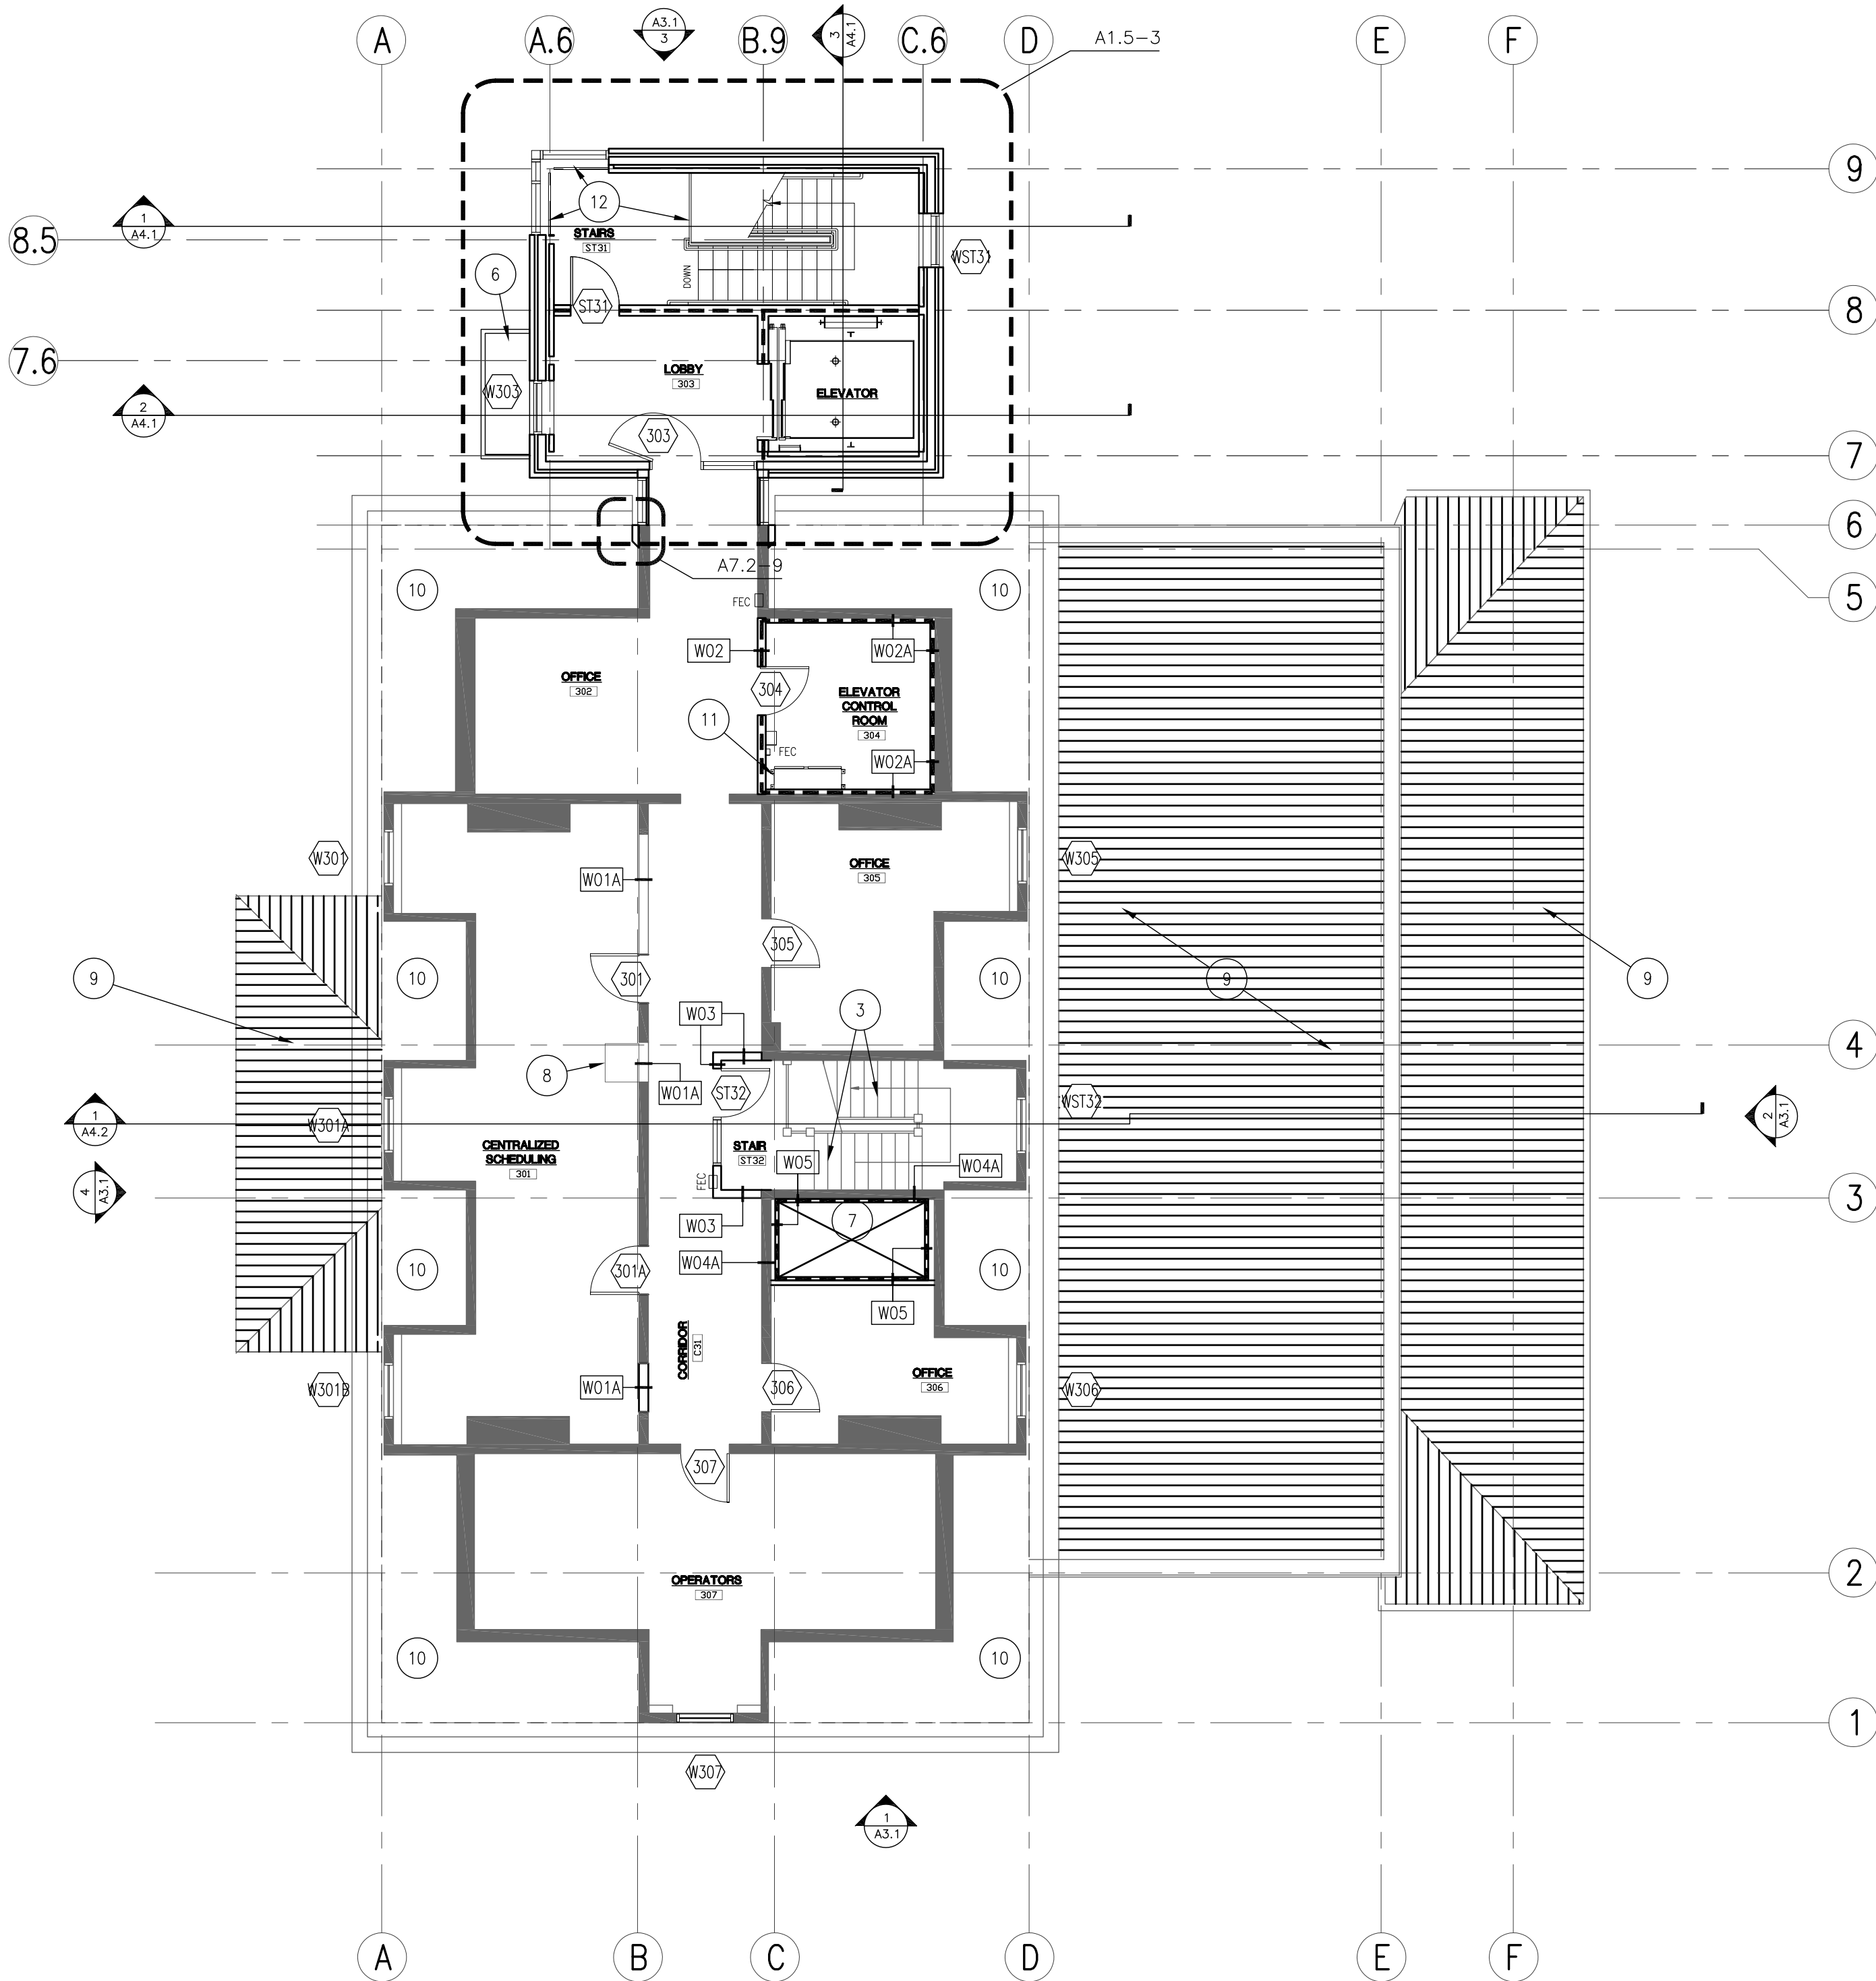

2 THIRD FLOOR PLAN BLDG. 33

WALL TYPES:

W01 TYPICAL NON-RATED SOUND WALL 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF 92mm (3 5/8") METAL STUDS @ 406mm (16") O.C.; EXTEND TO UNDERSIDE OF STRUCTURE; TAPE JOINTS ABOVE CEILING. PROVIDE SOUND BATT INSULATION FULL HEIGHT OF WALL.	W02A 1-HR. RATED SOUND WALL 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF 92mm (3 5/8") METAL STUDS @ 406mm (16") O.C.; EXTEND TO UNDERSIDE OF STRUCTURE; FIRE TAPE JOINTS ABOVE CEILING. PROVIDE SOUND BATT INSULATION FULL HEIGHT OF WALL. FIRE SAFE PENETRATIONS.	W05 SHAFT WALL 1-HR 25mm (1") SHAFT WALL LINER AND 16mm (5/8") GYPSUM WALL BOARD, 89mm (3 1/2") METAL C-H STUDS @ 610mm (24") O.C.; EXTEND TO UNDERSIDE OF STRUCTURE. FIRE TAPE JOINTS ABOVE CEILING. FIRE SAFE PENETRATIONS.	W08 CHASE WALL 16mm (5/8") GYPSUM WALL BOARD ON ONE SIDE OF 150mm (6") METAL STUDS @ 406mm (16") O.C. EXTEND TO UNDERSIDE OF STRUCTURE.
W01A INFILL WALL 92mm (3 5/8"), 152mm (6"), OR AS REQUIRED METAL STUD TO INFILL EXISTING OPENING OR EXTEND EXISTING WALLS SO THAT FACE OF STUD ALIGNS W/FACE OF EXISTING PLASTER OR BRICK WALL. APPLY (1) LAYER 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF METAL STUDS AND EXTEND OVER PLASTER OR BRICK. EXTEND GYPSUM BOARD AND METAL STUDS TO UNDERSIDE OF STRUCTURE. TAPE JOINTS ABOVE CEILING. PROVIDE SOUND BATT INSULATION FULL HEIGHT OF WALL.	W03 NON-RATED PARTITION 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF 92mm (3 5/8") METAL STUDS @ 406mm (16") O.C. TO EXTEND 150mm (6") ABOVE CEILING; EXTEND STUDS TO UNDERSIDE OF STRUCTURE.	W06 FURRING 16mm (5/8") GYPSUM WALL BOARD OVER 50mm (2") METAL FURRING (U.O.N.) @ 406mm (16") O.C.; EXTEND TO 150mm (6") ABOVE CEILING.	W09 NON-RATED PARTITION 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF 150mm (6") METAL STUDS @ 406mm (16") O.C. TO EXTEND 150mm (6") ABOVE CEILING; EXTEND STUDS TO UNDERSIDE OF STRUCTURE.
W02 1-HR. RATED SOUND WALL 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF 152mm (6") METAL STUDS @ 406mm (16") O.C.; EXTEND TO UNDERSIDE OF STRUCTURE; FIRE TAPE JOINTS ABOVE CEILING. PROVIDE SOUND BATT INSULATION FULL HEIGHT OF WALL. FIRE SAFE PENETRATIONS.	W04 EXISTING WALL 16mm (5/8") GYPSUM WALL BOARD EACH SIDE OF EXISTING PLASTER OR BRICK WALL. EXTEND TO 150mm (6") ABOVE CEILING; SHIM AS REQUIRED.	W07 CHASE WALL 16mm (5/8") GYPSUM WALL BOARD ON ONE SIDE OF 92mm (3 5/8") METAL STUDS @ 406mm (16") O.C. EXTEND STUDS TO UNDERSIDE OF STRUCTURE, EXTEND GYPSUM BOARD TO 150mm (6") ABOVE CEILING.	
	W04A EXISTING WALL 16mm (5/8") GYPSUM WALL BOARD ONE SIDE OF EXISTING PLASTER OR BRICK WALL (VISIBLE SIDE). EXTEND TO 150mm (6") ABOVE CEILING; SHIM AS REQUIRED.		

LEGEND:

	FIRE EXTINGUISHER CABINET, RE: A7.2-14 AND 15.
	CORNER GUARD
	NEW CONSTRUCTION
	EXISTING CONSTRUCTION
	1-HR. RATED WALL ASSEMBLY

SHEET NOTES:

- NO NOTE PROVIDED.
- NO NOTE PROVIDED.
- REFINISH EXISTING STAIRS AND RAILINGS. REPAIR AND RECONSTRUCT ANY MISSING OR DAMAGED COMPONENTS. INSTALL A NEW HANDRAIL TO MATCH EXISTING PROFILE @ WALL, FULL HEIGHT OF STAIRS.
- PATCH BACK HOLE IN WALL WHERE CHIMNEY WAS REMOVED, CW/ STRUCTURAL.
- NO NOTE PROVIDED.
- STEEL CANOPY BELOW CW/ ROOF PLAN AND EXTERIOR ELEVATIONS.
- MECHANICAL CHASE. CW/ MECHANICAL DRAWINGS.
- PATCH BACK FLOOR TO MATCH EXISTING WHERE CHASE WAS REMOVED CW/ STRUCTURAL.
- NEW METAL ROOF BELOW CW/ ROOF PLAN.
- EXISTING SLATE SHINGLE ROOF. CW/ ROOF PLAN AND RESTORATION DRAWINGS.
- ELEVATOR CONTROL EQUIPMENT CW/ ELECTRICAL AND ELEVATOR SUPPLIER.
- PAINTED STEEL GUARD RAIL.
- PATCH FLOOR WHERE CHIMNEYS WERE REMOVED, MATCH FLOOR FRAMING AND SUBSTRATE TO ADJACENT SURFACE.

95% SUBMISSION

CSH6A

C.W. MOORE PLAZA
250 S. 5TH ST. • BOISE, ID 83702
(208) 343-4635 • FAX (208) 343-1858
http://www.cshqa.com

JOHN D. MAULIN, ARCHITECT
C.W. MOORE PLAZA
250 S. 5TH ST.
BOISE, IDAHO
PHONE: (208) 343-4635 FAX: (208) 343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT. ENGINEER WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT. THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY ON OTHER PROJECTS, FOR ANY PURPOSE, WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY
NOT FOR
CONSTRUCTION

DRAWING TITLE

FLOOR PLANS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC
RENOVATE
BUILDING 33

BUILDING NUMBER

33

LOCATION

BOISE, IDAHO

DATE

03/04/11

PROJECT NO.

531-10-114

DRAWING NO.

A1.2

DWG. 16 OF 102

DEPARTMENT OF VETERANS AFFAIRS